



**30 Watt
AC/DC Modules, PCB mounting
Series DVA30-TB**



Features

- Wide Input Range 90 – 264 VAC
- Single Outputs, regulated
- Isolation I/O 3,0 KVAC
- Operating Temperature Range -40°C to +85°C
- EN 55022 Class B / CE Conformity
- 100% burn in
- Dimension 76 x 51 x 22,5 mm

MODEL NUMBER	INPUT VOLTAGE [VAC (47...440Hz)/VDC]	OUTPUT VOLTAGE [VDC]	OUTPUT CURRENT [mA] MAX.	EFF. [%] Typ.	CASE
DVA30-05S6000TB	90 – 264 / 110 – 370	5	6000	86	TB
DVA30-12S2500TB		12	2500		
DVA30-15S2000TB		15	2000		
DVA30-24S1250TB		24	1250		
DVA30-48S625TB		48	625		

Option:
(T): External Voltage Adjustment

Further options and special voltages on request.

INPUT SPECIFICATIONS:

Input Voltage see table
 Input Frequency 47 – 440Hz

OUTPUT SPECIFICATIONS:

Output Voltage Accuracy ±2,0%
 Ripple 1%Vp-p of Vout
 Noise (≤30MHz) 2%Vp-p of Vout
 Temperature Coefficient 0,02%/°C of Vout
 Short Circuit Protection continuous
 Line Regulation (Vin min. – Vin max.) ±0,1%
 Load Regulation (Iout 0,25% - Iout max.) ±0,5%
 Load regulation 5V Output ±1%
 Current Limitation Primary

GENERAL SPECIFICATIONS:

Efficiency see table
 Isolation Voltage I/O 3,0k VAC
 Switching Frequency 140 KHz max.
 Operating Temperature Range -40°C to +85°C
 Derating above +50°C Linearly 2%/°C
 Case Temperature 100°C max.
 Storage Temperature Range -40°C to +105°C
 Electrical Safety (in Accordance with) EN60950
 Interference immunity EN61000-6-2; EN61000-4-2,-3,-4,-5,-6,-11
 Burst (±2KV) EN61000-4-4
 Surge (±1KV symmetrical,±2kV asymmetrical) EN61000-4-5
 EMI/RFI EN61000-6-4 (EN55022 Class B)
 Dimension (L x W x H) 76 x 51 x 22,5 mm
 Case Material Plastic PCGF20 (UL94-V0)
 Weight 150g


Note:

1. Temperature Range -40 to 0°C they may not meet all specification listed.

All data with ambient temperatures of +25°C and nominal input voltage.

CASE TB


Bottom View. Pin diameter = 1, data in mm

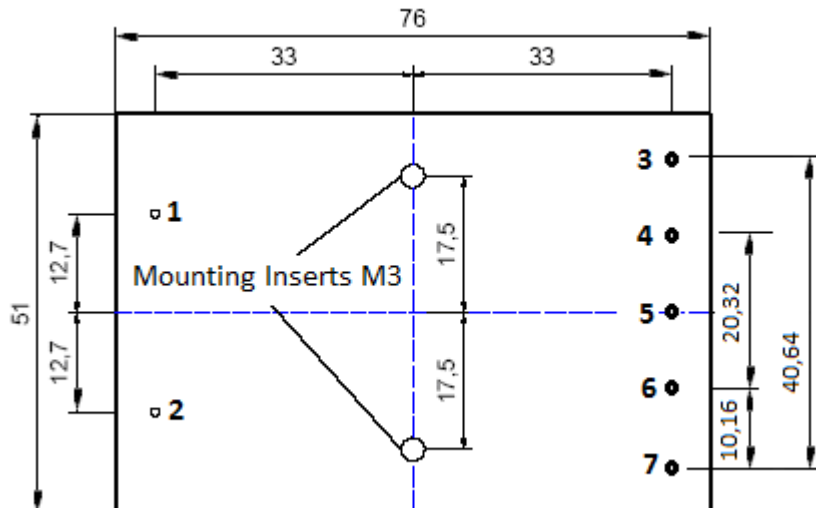

CONNECTION	
Pin	SINGLE
1	AC Input
2	AC Input
3	-Vout
4	No Pin
5	No Pin
6	No Pin
7	+Vout

CASE TB Suffix -KPB

Bottom View. Pin diameter = 1, data in mm

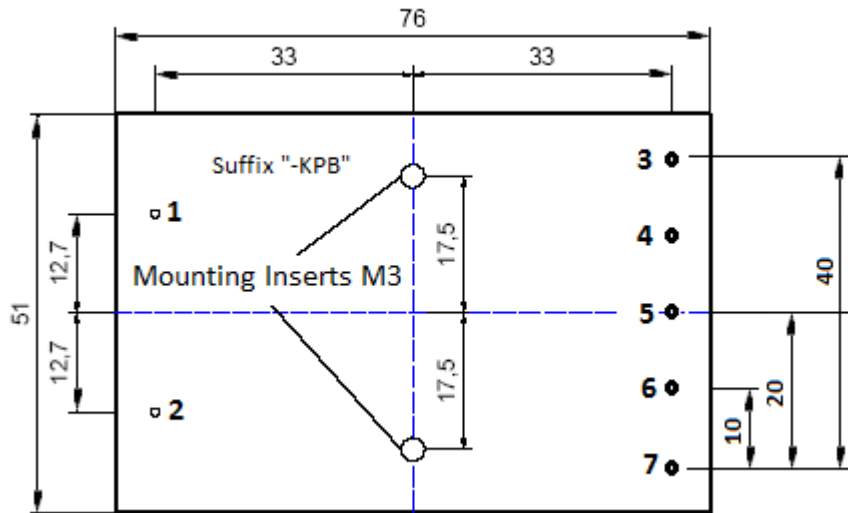

CONNECTION	
Pin	SINGLE
1	AC Input
2	AC Input
3	-Vout
4	No Pin
5	No Pin
6	No Pin
7	+Vout

Technische Änderungen vorbehalten / Technical change reserved without notice